

Product Specification

Product Title
 PACKING TAPE CLEAR HOT MELT 48MM X 66M 6/PACK
 Product Code
 TAP48HMC

Product:

25 Micron Polypropylene Hot Melt

Typical Applications:

- Carton Sealing Tape
- Hand or machine application
- Good at elevated temperatures


Advantages & Benefits:

- Excellent adhesion
- Good temperature resistance
- High initial tack
- Solvent free adhesive

Construction:

- Bi-orientated polypropylene film
- Synthetic rubber (Hot Melt) adhesive
- Available unprinted & printed up to 8 colours*
- Widths available - 25mm - 600mm*
- Lengths available - 66m - 1500m
- White, Clear, Brown

CONSTRUCTION

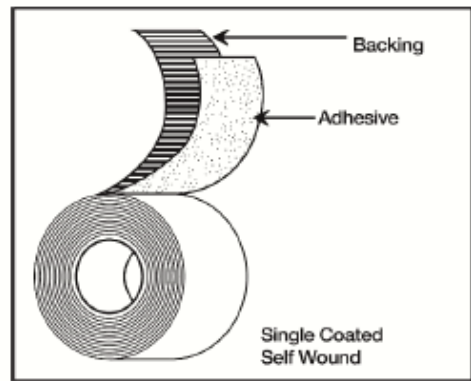

*Lead times may vary depending on number of colours printed. Minimum order quantities apply

Technical Data

Measure	Unit	Result & Tolerance
Film thickness	Microns	25 +/- 5%
Adhesive coat weight	Grams/square metre	18 +/- 5%
Total thickness	Microns	43 +/- 5%
Peel adhesion (Afera 5001)	Newtons/25mm	10 +/- 5%
Elongation (Afera 5004)	%	<165
Tensile Strength (Afera 5004)	Newtons/cm	40 +/- 5%

Additional information

Tape performance is guaranteed for the first 6 months. Product must be stored at ambient temperature (Between 18c-23c), in its original box and in a dry atmosphere away from direct sunlight. For product traceability, please advise the batch identification number printed on the box. For optimum performance stock should be rotated and used within 12 months. The tapes have adhesive that are pressure sensitive so must be properly applied to ensure the best performance.

Physical and performance characteristics shown above are obtained following tests recommended by AFERA and PSTC. The values given are typical values and do not constitute a specification. The user should determine whether the tape is suitable for the intended application.

While we have taken all reasonable steps to verify the accuracy of the information contained in this specification, no warranties are given to this effect and purchasers should determine for themselves whether products are suitable for their own specific use. The information contained in this specification is intended for the customer it has been issued to. It must not be reproduced, or the information contained therein passed on to any third party without the written consent of Scobie & Junor.

Product Specification



Customer Approval of Specification	
Please sign and return this specification to technical@scobie-junor.co.uk to confirm formal acceptance of this specification. All specifications issued will be deemed to be accepted if no communication to the contrary is received after 10 working days.	
Signature:	
Print name:	
Position:	
Date:	

Issued by Scobie & Junor (Estd. 1919) Ltd. Certified accurate on 08/10/2021 06:58:15

While we have taken all reasonable steps to verify the accuracy of the information contained in this specification, no warranties are given to this effect and purchasers should determine for themselves whether products are suitable for their own specific use. The information contained in this specification is intended for the customer it has been issued to. It must not be reproduced, or the information contained therein passed on to any third party without the written consent of Scobie & Junor.