

# Product Specification

Product Title	PACKING TAPE CLEAR LOW NOISE 48MM X 66M 6/PACK
Product Code	TAP48LNC

## Product:

Low Noise 25 Micron Polypropylene Acrylic

## Typical Applications:

- Carton Sealing Tape
- Hand application
- High & low temperature


## Advantages & Benefits:

- Low Noise Unwind
- Good temperature resistance
- Adhesive has excellent UV resistance
- Solvent free adhesive

## Construction:

- Bi-orientated polypropylene film
- Acrylic (Water Based) Adhesive
- Available unprinted
- Widths available - 48mm
- Lengths available - 66m

## CONSTRUCTION

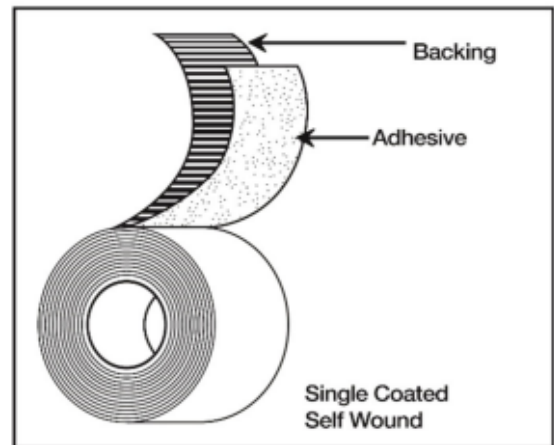

\*Lead times may vary depending on number of colours printed. Minimum order quantities apply.

## Technical Data

<u>Measure</u>	<u>Unit</u>	<u>Result &amp; Tolerance</u>
Film thickness	Microns	25 +/- 5%
Adhesive coat weight	Grams/square metre	20 +/- 5%
Total thickness	Microns	45 +/- 5%
Peel adhesion (Afera 5001)	Newtons/25mm	4.8 +/- 5%
Elongation (Afera 5004)	%	<165
Tensile Strength (Afera 5004)	Newtons/cm	40 +/- 5%

While we have taken all reasonable steps to verify the accuracy of the information contained in this specification, no warranties are given to this effect and purchasers should determine for themselves whether products are suitable for their own specific use. The information contained in this specification is intended for the customer it has been issued to. It must not be reproduced, or the information contained therein passed on to any third party without the written consent of Scobie & Junor.

# Product Specification



## Additional information

Tape performance is guaranteed for the first 6 months. Product must be stored at ambient temperature (Between 18c-23c), in its original box and in a dry atmosphere away from direct sunlight. For product traceability, please advise the batch identification number printed on the box. For optimum performance stock should be rotated and used within 12 months. The tapes have adhesive that are pressure sensitive so must be properly applied to ensure the best performance.

Physical and performance characteristics shown above are obtained following tests recommended by AFERA and PSTC. The values given are typical values and do not constitute a specification. The user should determine whether the tape is suitable for the intended application.

Customer Approval of Specification	
Please sign and return this specification to <b>technical@scobie-junor.co.uk</b> to confirm formal acceptance of this specification. All specifications issued will be deemed to be accepted if no communication to the contrary is received after 10 working days.	
Signature:	
Print name:	
Position:	
Date:	

Issued by Scobie & Junor (Estd. 1919) Ltd. Certified accurate on 29/11/2022 15:56:36

While we have taken all reasonable steps to verify the accuracy of the information contained in this specification, no warranties are given to this effect and purchasers should determine for themselves whether products are suitable for their own specific use. The information contained in this specification is intended for the customer it has been issued to. It must not be reproduced, or the information contained therein passed on to any third party without the written consent of Scobie & Junor.