


## Technical Data Sheet

**Product Name: Bondpad - BPNAG18**

**Structure: EMBOSED**

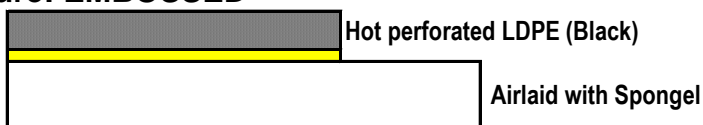

Laminated product by hot melt technology

Characteristic	Unit	Method	Min	Mean *	Max
Grammage	gr/m <sup>2</sup>	M.I.P.1	<b>101</b>	<b>113</b>	<b>125</b>
Absorption in solution NaCl 0,2%	gr/m <sup>2</sup>	M.I.A.10	<b>1620</b>		
Thickness	mm	EN 29073		<b>1</b>	
Tensile strenght - Dry MD	N/50mm	ISO 9073 - 3		<b>n.r.</b>	
Tensile strenght - Dry CD	N/50mm	ISO 9073 - 3		<b>n.r.</b>	
Elongation at max. force - Dry MD	%	ISO 9073 - 3		<b>n.r.</b>	
Elongation at max. force - Dry CD	%	ISO 9073 - 3		<b>n.r.</b>	

\* where not specified, tolerance +/- 10%

### Law requirements

ABSORBING PAD SUITABLE FOR FOOD CONTACT REFERRING TO REG 1935/2004 AND 2023/2006

MAGIC CAN ASSURE THE PERFORMANCE OF THE PRODUCT UNTIL 12 MONTHS FROM THE DATE OF SHIPMENT IF:

- STORED IN A DRY AND FRESH ATMOSPHERE (HUMIDITY 40-70%) AT AMBIENT TEMPERATURE (5-30°C)
- STORED FAR FROM SOURCE OF HEAT AVOIDING DIRECT EXPOSURE IN THE LIGHT OF THE SUN

Date: 24/02/2021  
Rev: 0

Issued by: *Alberto Spengo*  
Quality Lab Manager Magic s.r.l.