

Technical data sheet

WEEGALFILM KOEX 810, KOEX 811, KOEX 812 KOEX 814

[Decl. UE ID3]

1 Product and producer's identification

- **Product description:** transparent plastic material, unprinted, PVC – P (plasticized polyvinyl chloride) film structured in reels of several widths.
- **Commercial name:**
 - WEEGAL FILM KOEX 810, KOEX 811, KOEX 812 , KOEX 814
- **Producer/supplier:**
- **Gruppo Fabbri (Svizzera) SA**
Via ai Molini n°3 – CH-6933 Muzzano (Switzerland)
Tel. (+41)(91) 960 15 15 – Fax (+41)(91) 967 27 72
- Website: www.gruppofabbri.com - E-Mail: gfsvizzera@gruppofabbri.com
- **Information spread by:** LAB

2 Product characteristics

- **Chemical composition:** Polyvinyl chloride (PVC) with plasticizers, anti-oxidants and stabilizers. All these raw materials are suitable for the foodstuffs contact; chlorine content: 37 – 38 %
- **Film type:** Extensible double-layer with antifog effect
- **Reel inner cardboard core diameter:** 112,0 – 112,7 mm
- **Reel outer core diameter:** 230 mm (max)
- **Physical data:**

Parameter	Unit of measure	Method	KOEX 810 10 µm	KOEX 811 11 µm	KOEX 812 12 µm	KOEX 814 14 µm	Tolerance ①
Nominal Thickness	µm	Internal	10	11	12	14	± 18 %
Nominal Width	mm	Internal	Various	Various	Various	Various	± 6 mm

- **Tensile properties referred to the nominal thickness¹:**

Parameter	Direction	Unit of measure	Method	KOEX 810 10 µm	KOEX 811 11 µm	KOEX 812 12 µm	KOEX 814 14 µm	Tolerance ①
Tensile strength at break	MD*	Kg/cm ²	ASTM D882	300	305	310	310	± 10 %
Elongation at break	MD	%	ASTM D882	110	120	130	135	± 10 %
Tensile strength at break	TD**	Kg/cm ²	ASTM D882	210	215	215	220	± 10 %
Elongation at break	TD	%	ASTM D882	180	185	190	195	± 10 %

* MD = longitudinal direction; ** TD = transversal direction.

¹The data shown in the previous table were obtained from analyzes conducted by an accredited laboratory UNI CEI EN ISO/IEC 17025:2018

Technical data sheet

WEEGALFILM KOEX 810, KOEX 811, KOEX 812 KOEX 814

[Decl. UE ID3]

■ **Gas transmission rates referred to the nominal thickness:**

Gas	Conditions	Unit of measure	Method	KOEX 810 10 µm	KOEX 811 11 µm	KOEX 812 12 µm	KOEX 814 14 µm	Tolerance ①
O ₂	23 °C, 0 % U.R.	cc/(m ² *24h) bar ⁻¹	ASTM F2622 (08)	13.100	12.450	11.800	10.500	± 10 %
CO ₂	23 °C, 0 % U.R.	cc/(m ² *24h) bar ⁻¹	ASTM F2476 (05)	88.500	84.250	80.000	70.500	± 10 %
Water vapour	38 °C 90 % U.R.	gr/(m ² *24h) bar ⁻¹	ASTM F1249 (06)	1.050	1.000	950	850	± 10 %

- The “**optical**” characteristics are tested by the properly qualified persons as foreseen by the “Laboratory Control” and by the “Control Project of the Manufacturing Development”.

① *Below stated tolerances are those used as parameter for quality controls performed at production line and/or internal laboratory and are representative of product features at the end of manufacturing process. Stated that above mentioned features might vary, being influenced by different factors such as preservation condition, transport, use and tests, quoted tolerance ranges are to be considered strictly indicative.*

3 Use conditions

■ **Conditions of use:**

- between 0 and 40 ° C (compatible with the regulations for the operation of the machine).
- WEEGAL FILM KOEX 810 is intended only for manual use. The producer is not responsible for the packaging performances in case of use on automatic equipment.

■ **Maximum time of use:**

- 18 months, from the date of packaging recorded in the cardboard box.

■ **Precautions for use:**

- NOT SUITABLE FOR CONVENTIONAL OVEN OR MICROWAVE
- Heating up to the temperatures specified in the Declaration of Conformity must be obtained in banks with controlled temperature heating;
- It is advisable to place the coil in the machine, adjusting it first before starting the product conditioning
- It is also advisable to remove the cardboard box only when it is ready for use and not to remove the label placed inside the core, to keep the references and be able to track the product;
- The printed side that you can carry should not be placed in contact with food products.

Technical data sheet

WEEGALFILM KOEX 810, KOEX 811, KOEX 812 KOEX 814

[Decl. UE ID3]

4 Storage

- **Maximum storage time:** see the option “Maximum use time” in point 3
- **Storage conditions:**
 - Store in a dry place at temperatures not exceeding 35 ° C;
 - Store so that the reels do not come into contact with water, liquids, odorous substances or chemical substances in general, so as not to alter the olfactory and taste properties, in addition to avoiding any type of contamination;
 - Keep the container always intact until use;
 - It is a good rule to use warehouse stocks in rotation, based on the delivery date of the merchandise;
 - It is a good rule to activate a pest analysis system in storage tanks so as not to contaminate the product.
- **Transportation conditions:**
 - Gruppo Fabbri Svizzera guarantees the control of transport vehicles loaded in its plant, to protect the product of any type of contamination due to foreign bodies, biological agents or chemical substances, as well as damage to them.
 - It is advised that the customer check the transport vehicles used, on their own, in the eventual transfer of the merchandise to preserve the quality characteristics of the product; These controls must be based in particular on the contact with liquids / chemical substances / odorous substances / foreign bodies or biological debris, as well as on the stability of the load, to prevent damage.
- **Handling:** Avoid damaging the reels to preserve functional characteristics.

5 Packaging way

The product is packaged in a closed paper cardboard box with two protection plastic caps. The cardboard boxes are then placed on a pallet, which is double strapped and wrapped with a transparent film.

6 Sustainability

The product complies with the requirements of the following technical standards:

- UNI EN ISO 13431: 2005 “Requirements for packaging recoverable in the form of energy recovery including the specification of the minimum calorific value”.


With reference to the identification of the nature of the packaging materials on the basis of Decision 97/129 / EU, it is specified that this information is reported both on the label inside the core, on the single cardboard box, and on the logistic label placed on the pallet.

Technical data sheet


WEEGALFILM KOEX 810, KOEX 811, KOEX 812 KOEX 814

[Decl. UE ID3]


In particular, in the label inside the core, you will find an indication of the material of which the plastic film we put on the market is made as well as the core that accompanies it:



In particular, on the box, you will find the above indications to which you can add information on the material of which the additional packaging materials we use are made (eg box, support caps, ...):

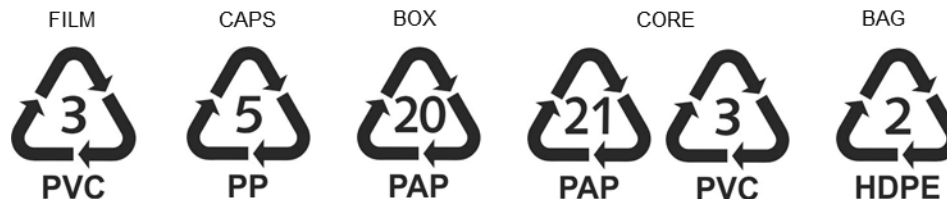

On the logistic label, you will find an indication of the additional packaging materials used for palletization (films and straps, eg...):

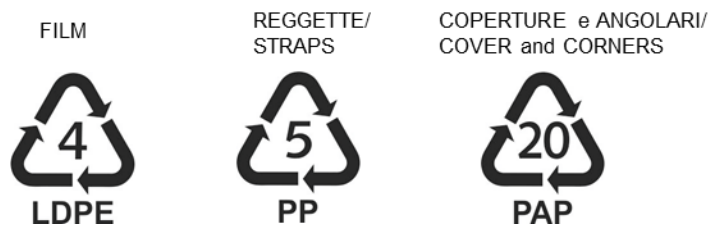

7 In the event of a complaint

In case of any complaint, please contact your sales representative and communicate in addition to the description of the problem also the batch number shown on the label inside the core and/ or on the cardboard box in order to proceed with the case's analysis.