




Simple all pneumatic operation, no electrics.



Nylon pistons, light, robust and easy to clean and change.



Bench mounted as standard, optional floor stand.



Camlock tube location, making even bent tube removal easy.



Works with standard 460 mm Scotnet Tubes. Minimise investment by keeping your existing loader and tubes.



Braked Castors on optional floor stand ensuring secure footing while working and easy movement when required.



Simple operation, simply close lid to start operation



TECHNICAL INFORMATION

Speed

The machine will cycle over 800 times per hour. Production speeds will depend on the product and the input and output flow to the machine.

Weight

Approximately 100 kg


Services

Compressed Air



80 psi or 5.5 BAR
50 ft³ or 1500 litres per minute

Packing Crate Dimensions

Length 1800 mm x Width 760 mm x Height 1460 mm

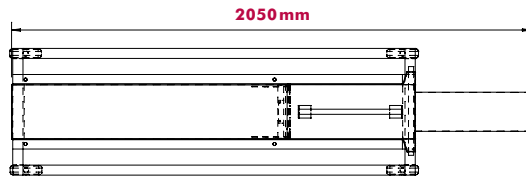

MACHINE DIMENSIONS (WITHOUT STAND)
320mm x 316mm x 1590 mm

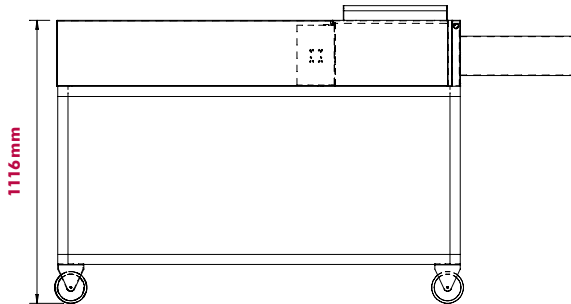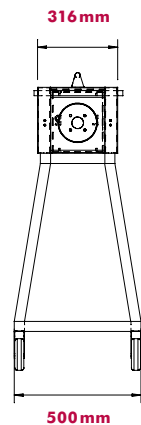

Please note: dimensions are subject to change without notice.